

 Kirli Su  
Dirty water

 Evsel Alan  
Domestic use


 Kamusal Alan  
Civil use

 Endüstriyel Alan  
Industrial use




W-T-K 5500 SERİSİ  
W-T-K 5500 SERIES







380V - 50 Hz



Max. 35° C



Cable 7 m



Max. 5 m


## Uygulamalar

W-T-K 5500 Serisi dalgıç pompalar; Yer altı suları, kanalizasyonlar, foseptik kuyuları, endüstriyel alanlar, inşaat alanlarının temellerinde bulunan kirli suların tahliyesinde kullanıma uygundur. Bu tip pompalar; Bıçak sistemli atık su drenaj pompaları diye de adlandırılmaktadır. Parçalayıcı bıçakları sayesinde kağıt, lif, ipliksi atık gibi maddeleri açık fan sistemli pompalara nazaran daha az problem ile tahliye edebilmektedir. W-T-K serisi pompalar patlayıcı ve yanıcı içerikli sıvılarla kullanıma uygun değildir.

## Application

W-T-K 5500 Serie submersible pumps are available for evacuation of dirty water in drain well, underground water, industrial and construction areas. This kind of pumps are called as dirty water pump with blade system. Thanks to its shredder blades this kind of pumps are more useful to evacuate dirty water that includes such as drainage contained short fibre, long fibre, waste paper, sand than the pumps which have open impeller system. W-T-K serie pumps have ideal equipment for agricultural irrigation and drainage, pool silt cleaning and site construction, but do not apply to the location with explosion-

## Performans Eğrileri 50 Hz/ Performance Curves at 50 Hz

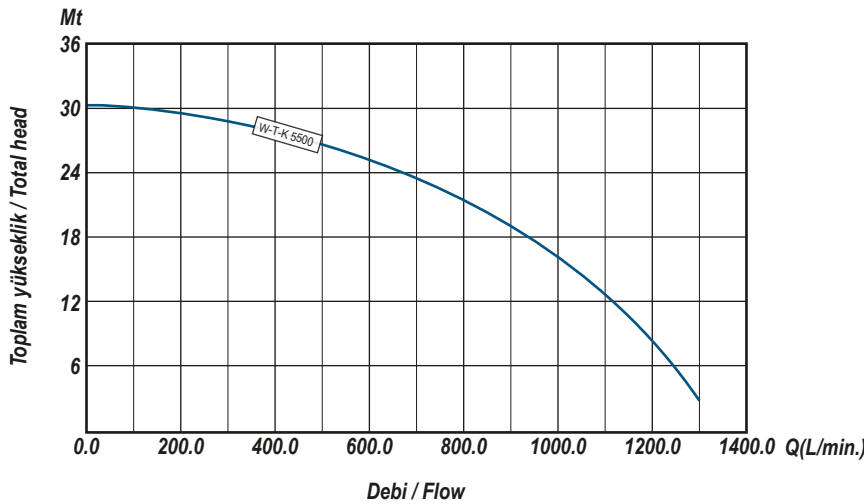

## Pompa Özellikleri/ Pump Specification

No	MODEL	W-T-K 5500
1	Anma Gücü	5500 Watt
2	Maksimum Pompa Basma Yüksekliği	30 m
3	Maksimum Debi	78000 l/saat
4	Maksimum Basınç	3,0 Bar
5	Çıkış Ölçüsü	3"
6	Sıvı PH Değeri	4 - 10
7	Maksimum Sıvı Yoğunluğu	1.2x10 <sup>3</sup> kg/m <sup>3</sup>
8	Koli Adeti	1 Adet
9	Koli Ölçüleri	38x30x77 cm
10	Koli Ağırlığı	85,5 kg

No	MODEL	W-T-K 5500
1	Rated Power	5500 Watt
2	Max. Pump Height	30 m
3	Max. Pump rate	78000 l/h
4	Max. Pressure	3,0 Bar
5	Dia of Connecting Pipe	3"
6	Liquid PH Value	4 - 10
7	Max.Liquid Density	1.2x10 <sup>3</sup> kg/m <sup>3</sup>
8	Qty in Carton Box	1 Pcs
9	Master Carton Box Size	38x30x77 cm
10	Master Carton Box Gross Weight	85,5 kg



[www.ulusupompa.com.tr](http://www.ulusupompa.com.tr)

MTOSB Atatürk Bulv. No:4 Huzurkent Mersin  
✉ info@ulusupompa.com.tr

☎ **0090 444 2 731**